



1

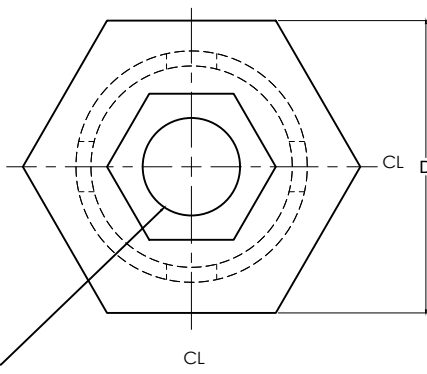

NOTES :

- 1-MATERIALS:
-PLATE PER CSA G40.21 50W, MIN.FY=60 KSI, FU=70KSI
-TUBES PER ASTM A500 GR C, FY=60KSI, ULTIMATE STRENGTH 70 KSI
2-ANY CHANGE OF MATERIAL IS SUBJECT TO GOLIATHTECH APPROVAL
3-WELD PERFORMED BY SHOP QUALIFIED CSA STANDARD W47.1 AND
W55.3 IN ACCORDANCE WITH GOLIATHTECH WELDING PROCEDURES.
WELDING PER CSAW47.1 AND W55.3.
4-HOT-DIP GALVANIZED, PARTS PER ASTM A123.
5- OVERTAP PER ASTM A563.

3		
2		
1	INITIAL RELEASE	2023-04-27
REV	MODIFICATION	DATE
REVISION		

REVISION

GOLIATH **TECH**

TITLE: Adjustable Hex Piles Base 1 7/8 with Nut

SEAL:

DWG. NO :

GT-BASE178-NUT

DRAWN BY:

R.E

DESIGN BY:

GOLIATHTECH

CHECK BY:

CPOC

APP BY:

CPOC

OTHER NO :

1.

FORMAT: A

REV.:	
-------	--

DATE :	
--------	--

PAGE :	
--------	--

SCALE: NTS

1

2023-04-27

1 DE 1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND MAY NOT BE REPRODUCED OR COPIED WITHOUT THE EXPRESS WRITTEN PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF GOLIATHTECH INC.

Note:

Useable to connect adjustable heads to piles

[illegible]

2

1