
1

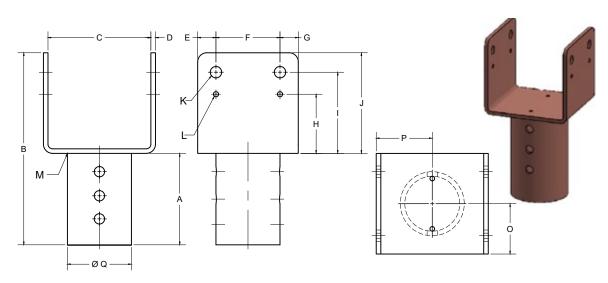

NOTES:

- 1-MATERIALS:
 - -PLATE PER CSA G40.21 50W, MIN.FY=60 KSI, FU=70KSI -TUBE PER ASTM A500 GR C, FY=60KSI, FU= 70 KSI.
- 2-ANY CHANGE OF MATERIAL IS SUBJECT TO GOLIATHTECH APPROVAL
- 3-WELD PERFORMED IN ACCORDANCE WITH CSA STANDARD W47.1 AND GOLIATHTECH WELDING PROCEDURES. WELDERS ARE ALSO CERTIFIED TO THE AWS STANDARD.

MECHANICAL ASD LOAD CAPACITY SEISMIC DESIGN

	NO.	Dimension	Description	CATEGORIES A,B AND C			CATEGORIES D,E AND F			
		(inches)	•	Compression (kips)	Tension (kips)	Lateral (kips)	Compression (kips)	Tension (kips)	Lateral (kips)	
	Α	6 3/8			21.04	13.66	50.10	17.53	13.66	
	В	13 7/8		58.40						F
	С	7 5/8	Wood post							L
	D	1/4								Ţ
	Ε	1 1/4								S
	F	5								ı
	G	1 1/4								ı
	I	5 15/64								
	_	6 7/16		Note: 1-The ASD capacities are based on limit states associated with mechanical steel strength of the bracket to the helical pile shaft. Wood post/beam (above), shaft, or geotechnical capacities may control. The member supported by the bracket must be designed by the registered design professional and must not exceed the tabulated capacities. 2-The tabulated capacities assume the pile foundation system is sidesway braced per IBC Section 18.10.2.2. 3-Tabulated capacities based on three (3) - ½ - inch diameter hex head bolts. 4-All components above the bracket, including the compression and tensile capacities of the wooden member based on species and its situational bearing conditions. Additionally, the connection between the wood member and the U bracket is to be determined by the design professional on a case by case basis. 5-Capacities for galvanized steel brackets are based on galvanized steel losing 0.036-inch (318 µm) steel]
١	J	7 1/2								
	K	5/8	Bolt 1/2"							
Ī	L	9/32	Wood screw							
	М	1/4	Weld							L
	0	3 3/4								F S
	р	4 1/16								TI
				1				5.000	,	I G

thickness as indicated in Section 3.9 of AC358 for a 50-year service life.

1	INITIAL RELEASE	2023-09-27
REV	MODIFICATION	DATE
	CLIATHE	CLI

,

GOLIATHTECH VENTURA LINE

TITLE: 7 5/8" non adj. U Bracket Pile Head for 3 1/2" Pile

SEAL:

2

DWG. NO:
VGTBRST312U758

DRAWN BY:
ARG

DESIGN BY:
GOLIATHTECH
CHECK BY:
CPOC

APP BY:
CPOC

OTHER NO: GTBREST312U758-N В

FORMAT:	Α	REV.:	DATE :	PAGE :	
SCALE:	NTS	1	2023-09-27	1 DE 1	

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND MAY NOT BE REPRODUCED OR COPIED WITHOUT THE EXPRESS WRITTEN PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF GOLJATHTECH INC.

4

Q

В